FLOTEC
USA Made!
7625 West New York Street Indianapolis IN 46214-4911
Phone: 317-273-6960 Fax: 317-273-6979
e-mail: orderdesk@floteco2.com
www.floteco2.com
Order Desk: 800-401-1723

How to Order Resident Nipple Adapter

The Flotec Resident Nipple Adapter consists of a swivel nut and a hose barb nipple with O-Ring. Optional chain lengths and are available and Flow orifices are available at different inlet pressures and Flows. To order it is necessary to SELECT and SPECIFY the features desired on each module. The R- Resident Nipple Adapter Code is used to identify and select these features.

Begin with the base unit. Move across the list of options, select one from each section, and specify the code for that option. When finished, you will have an assembly number such as **HDB25**. This number, for example identifies a:

HBD2 - Resident Nipple Adapter with 2-1/2" Stainless Steel Chain with connecting ring
5 - Blue Anodized Knurled Nut

Now move to the optional flow orifices. Following the same procedure will produce an assembly number such as **50-6**. This number, for example identifies a:

50 - 50 PSI Inlet Pressure
6 - 6 LPM

Combining the two assembly numbers will provide a complete regulator part number such as **HBD25-50-6**.

HBD2 5 -- 50 -- 25 B-Resident Nipple Adapter Code (2020-02-06).xlsx.pdf

PRODUCT GROUP and CHAIN LENGHT:
- HBD0 - No Chain
- HBD2 - 2-1/2" Chain
- HBD4 - 4" Chain
- HBD6 - 6" Chain
- HBD8 - 8" Chain
- HBDA - 10" Chain

COLOR OPTION:
- NONE - Green Anodized Knurled Nut
- 4 - Yellow Anodized Knurled Nut
- 5 - Blue Anodized Knurled Nut
- 6 - Red Anodized Knurled Nut
- 9 - Black Anodized Knurled Nut
- A - Purple Anodized Knurled Nut

PRESSURE OPTIONS for FLOW ORIFICES:
- 20 - 20 PSI Inlet Pressure
- 50 - 50 PSI Inlet Pressure
- 58 - 58 PSI Inlet Pressure

FLOW OPTIONS:
- 0.5 - 0.5 LPM
- 1 - 1 LPM
- 2 - 2 LPM
- 4 - 4 LPM
- 6 - 6 LPM
- 8 - 8 LPM
- 10 - 10 LPM
- 12 - 12 LPM
- 15 - 15 LPM
- 20 - 20 LPM
- 25 - 25 LPM

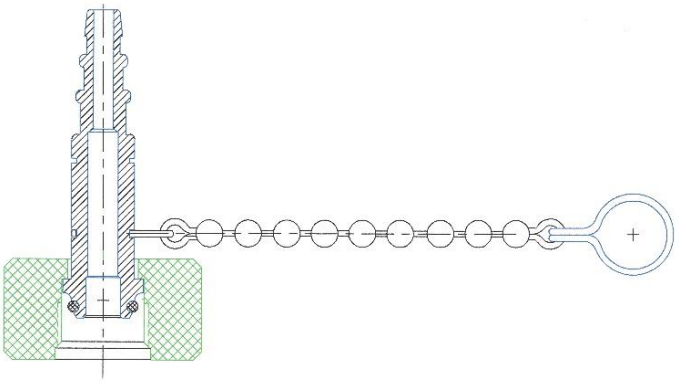

© Flotec, Inc. 1983-2019